



MPR-3000S

Description

- Readout box
- 16 bit, 32MHz Microprocessor
- 24 bit ADC provides high resolution signal
- Built-in converters: USB to RS485, RS232 to RS485
- Easily connected to PC with USB cable
- Communication software is provided to monitor real time flow rate and accumulation

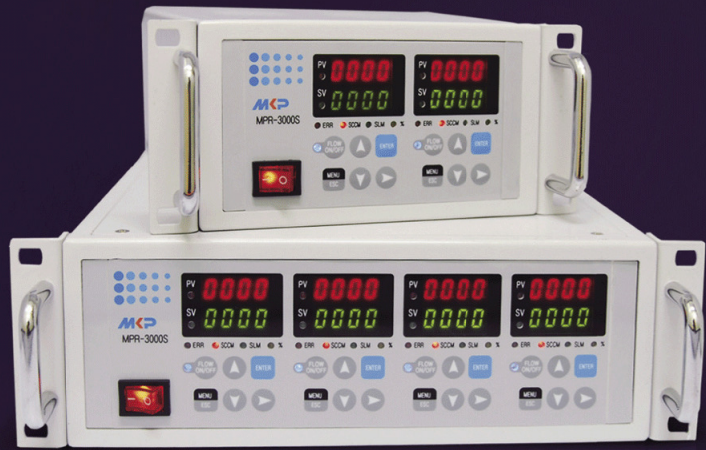

Connect to PC

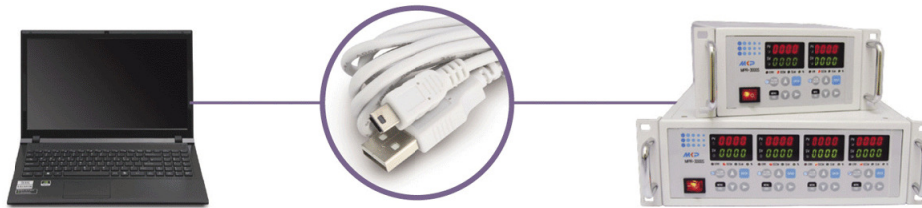

Software

Flow rate control, flow accumulation, and real time monitoring



External dimensions

